V-2-M2SA *2U 2-Bay Storage Server Rackmount Chassis*



Features

- Industrial Grade Aluminum Drive Tray Handle with iStarUSA Signature Design
- Ultra Compact 15" Body Depth
- Fiber Optical Drive Tray Status Indicator
- Advance Thermal Cooling Design that Optimize Airflow
- Front Access USB Connector
- Power, HDD, Alarm Led, and Power ON/OFF, Alarm Rest Switch
- RoHS Compliance

Power Supply

Model #	Description
CP-01035	350W 1U Switching Power Supply
CP-01040	400W 1U Switching Power Supply

Introduction

The V-storm Series storage server rackmount chassis with iStarUSA signature drive trays not only has the stylish looks, but also has the functionality, flexibility, and uncompromised performance that make V-storm series a new breed of storage server. As Serial technology became a more cost effective solution, iStarUSA has taken a step forward to prepare the migration of new technology trend. We also incorporated redundant OS drive to ensure total up time of mission critical server applications.

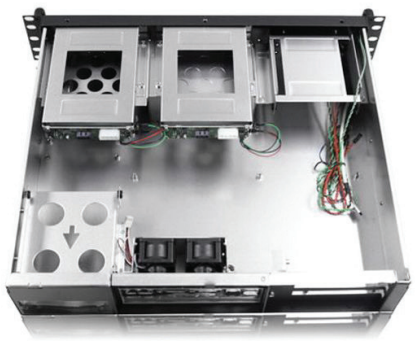

Specifications

Form Factor	2U
Mainboard Size(in)	12 x 10
Cooling Fan [optional]	2x40mm 1x95mm Blower Fan
Standard Drive Bays	Hot-swap Drive: 23.5" Slim Optical Drive: 1 Slim FDD Drive: 1 3.5" Drive (internal): 2
Backplane	SATA I/SATA II
Material	Zinc-Plated with Bright Chromate Heavy-Duty Cold-Roll Steel
Material of Handle	Aluminum
Indicators	Power + Fan Failure + HDD LED
Expansion Slots	3 x Full Height PCI Slots or 7 x Low Profile (Option)
Switches	Power ON/OFF and System Reset
Dimension (W x H x D)	19 x 3.5 x 15 inches
Industry Standard	EIA-RS310D
Temperature	0°C (32°F) ~ 50°C (122°F)
Humidity	5% ~ 95% Non-Condensing

Drawing

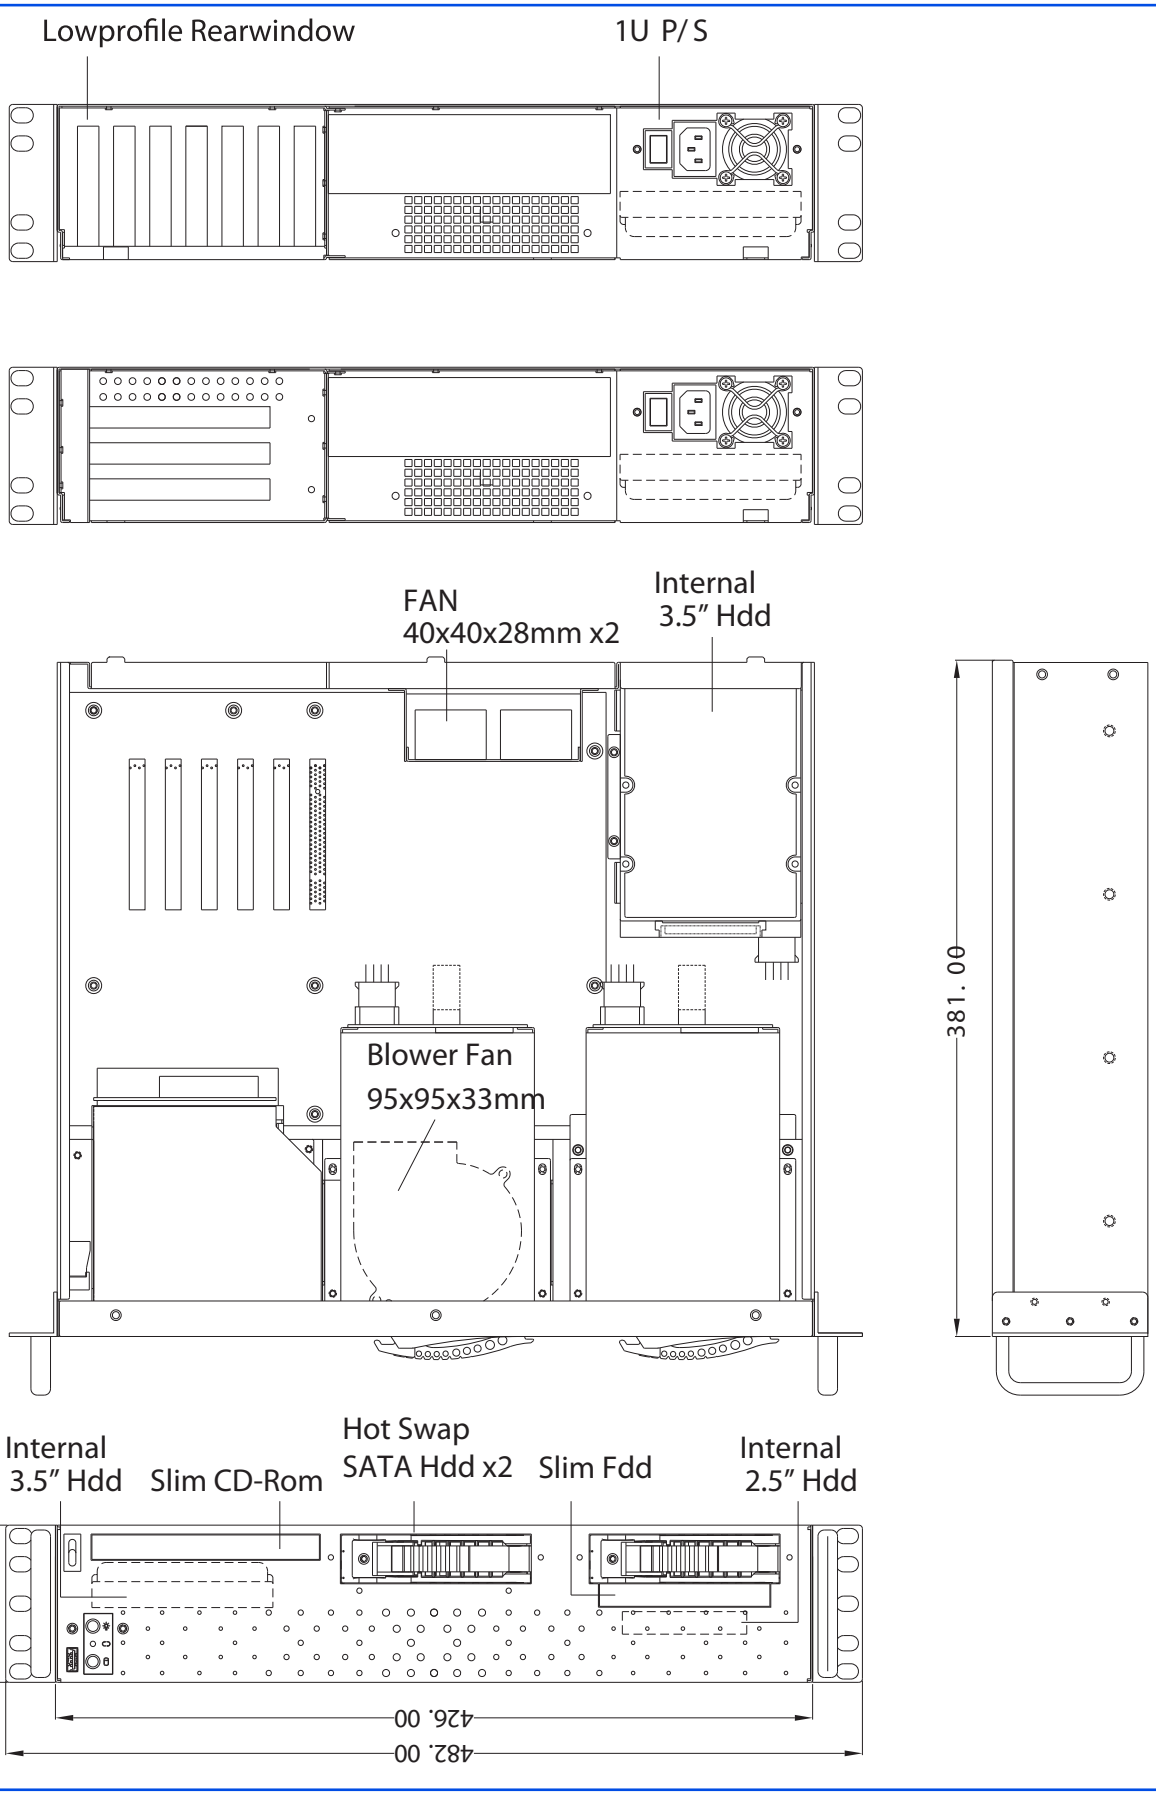
Lowprofile Rearwindow
1U P/S
FAN
40x40x28mm x2
Internal
3.5" Hdd
Blower Fan
95x95x33mm
381.00
Internal
3.5" Hdd
Slim CD-Rom
Hot Swap
SATA Hdd x2
Slim Fdd
Internal
2.5" Hdd
88.50
426.00
482.00